
STANDARD Resistive Touch Panel Specification FID-550 7-Wire Series



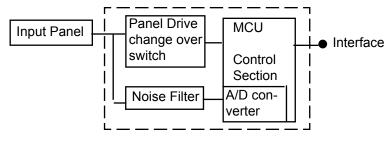

FEATURES

• Superior long life, using a unique construction method offering improved life over typical technologies; by sensing data input only on the glass layer, typically a 10x improvement in product life is achived.

- · Excellent specification and high quality
 - Anti-Newton ring technology
 - High reliability materials
- Pen/Finger, Pen Only, Finger Only, Light Touch types available
- Transparency 80% typical

PART NUMBERS

Touch Panels:

| Part Number | Size | Туре | |
|----------------|-------|-------------------------------|--|
| N010-0510-T302 | 17" | Pen/Finger | |
| N010-0510-T211 | 15" | Pen/Finger | |
| N010-0550-T913 | 13.3" | Pen/Finger | |
| N010-0550-T711 | 12.1" | Pen/Finger | |
| N010-0551-T242 | 12.1" | Pen/Finger (light touch type) | |
| N010-0550-T811 | 11.3 | Pen/Finger | |
| N010-0550-T601 | 10.4" | Pen only | |
| N010-0550-T611 | 10.4" | Pen/Finger | |
| N010-0550-T621 | 10.4" | Pen/Finger (light touch type) | |
| N010-0550-T511 | 9.5" | Pen/Finger | |
| N010-0550-T341 | 8.4" | Pen/Finger | |

Controller Boards:

| Part Number | Туре | |
|----------------|---------------|--|
| N16B-0558-B240 | 7-Wire, RS232 | |
| N16B-0558-B720 | 7-Wire, USB | |


PART NUMBERS

Interface Controller Chips:

| | • | |
|----------------|---------------|--|
| Part Number | Туре | |
| N010-0559-V022 | 7-Wire, RS232 | |
| NC41120-0015 | 7-Wire, USB | |

FID-550 SERIES

DIMENSION EXAMPLE (10.4" SHOWN)

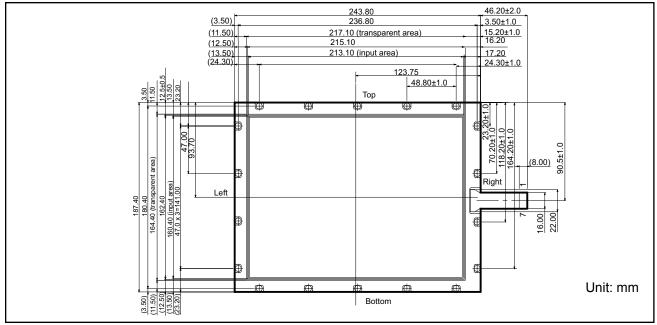

DETAILED SPECIFICATION

■ 1.0 APPLICATION


This specification applies to the 10.4" (inch) standard Touch Panel (Pen/Finger type). P/N is N010-0550-T611.

■ 2.0 ADDITIONAL APPLICATIONS

Control IC specifications and Control PCB, complete Touch Panel Specifications are also applicable.

■ 3.0 DISCRIPTION AND BLOCK DIAGRAM

This panel in combination with a control IC chip is used to transfer the co-ordinates of the touched position to the host system (see block diagram above).

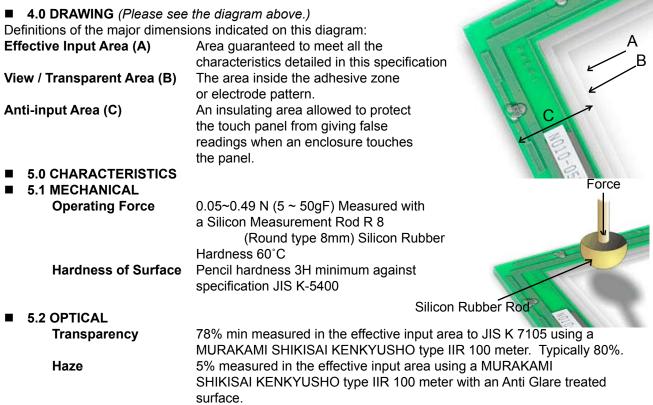

FID-550 SERIES

Theoretical

Actual

Distance

■ 5.3 ELECTRICAL

| Location Accuracy: | ±2.5mm Measured over 9 points (See note 1) | |
|-----------------------------|---|--|
| Linearity: | 1.5% | |
| Current Consumption: | 20mA max at DC 5V when applying 5VDC between pins 3 & 5 | |
| Switch Bounce (Chattering): | 10ms min when using the silicon rubber measurement rod. | |
| Insulation resistance: | 10M Ω minimum at 25KV DC applied between pins 3 & 7 or | |
| | between 5 and 7 | |
| Dielectric Strength: | 25KV DC for 1 minute | |

Note 1:

Measurement condition of linearity is corrected within the control IC. In general the location accuracy is specified as follows:

Actual co-ordinate point - theoretical co-ordinate point = location accuracy.

In general a 9 point co-ordinate calibration system is used to adjust the micro controller accuracy. (20 point can be used in combination with an EEPROM design). *Note 2:*

Pins 3, 5 and 7 are the glass and film connection points.

■ 5.4 ENVIRONMENTAL

Operating Temperature (*): Storage Temperature: Operating Humidity: Storage Humidity: Chemical Resistance: -5°C to 60°C -30°C to 70°C 20% to 90% RH with a Maximum wet bulb temperature of 38°C 10% ~ 90% RH with a Maximum wet bulb temperature of 38°C Coating with the following chemicals and storing at room temperature for 2 hours gives no problems. 10% NaCl-water solution, ethyl-acetate, ethylalcohol, toluene, methyl-ethyl-ketone.


Co-ordinate Point


Error

5.5 PEN LIFE

Character Writing life: Touch Input life : Note 1: 1,000,000 words minimum 10,000,000 times minimum

Words are written in the notes area and the size of the word is 7.5mm x 6.75mm. A word is any Alphabet / Number / Mark. The pen is as shown below and applies a force of 250g. A failure is judged to happen when the current consumption or insulation resistance or dielectric strength are not met as shown in 5.3. The location accuracy with 9 point calibration must be ± 4.4 mm max.

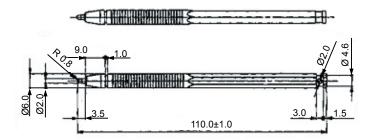



FID-550 SERIES

■ 5.6 FINGER LIFE



A finger is simulated by a silicon rubber plunger R8 (Round type 8mm size) hardness 60°C at 200g at frequency 5Hz.

A failure is judged to happen when the current consumption or insulation resistance or dielectric strength are not met as shown in 5.3. The location accuracy with 9 point calibration must be ±4.4 mm max. Typical operating force is 150g max.

■ 5.7 INFORMATION ON THE PANEL

The panel part number is visible from the film side ______ The production information is visible from the glass side. Production year 99 00 etc.

 1 2 3 4 5 6 7 8 9 X Y Z or
 1 2 3 4 5 6 7 8 9 X Y Z
 January Production

 [] 2 3 4 5 6 7 8 9 X Y Z or
 O2 3 4 5 6 7 8 9 X Y Z
 February Production

□□□□□□□□□□Zor 123456789 Y⊘

December Production


■ 6 PACKAGING

■ 6.1 PACKING SPECIFICATION

Vibration:10~55 Hz at 1 Octave per minute 10G 20 cycles with one side 0.75mmDrop test:60cm Drop 1 corner, 3 crease lines and 6 faces. 1 each 1 timeAfter the test no glass:flaw or crack is seen, and no dent or scratch on the film.
Also glass and film must not separate.

■ 6.1 PACKING DETAILS

Each touch panel is placed into a plastic bag and is held in place by a slit cut into the side of the cardboard. A second insertion piece is placed into the carton to again add stability. The qty is written on the side of the box. For example the T611 has 26 pieces per box.



■ 7.0 REJECT CRITERIA

| Description | | Reject Criteria | | |
|---|-----------|---|---|--|
| Film Dent | | Area ≥ 0.1 mm ² Area ≥ 0.05 mm ² & area < 0.1 mm ² Area < 0.05 mm ² | : to be zero : to be max. 5 points : none specified | |
| material between | Dot type | Area > 0.1 mm ² Area > 0.05 mm ² & area < 0.1 mm ² Area < 0.05 mm ² | : to be zero : to be max. 5 points : none specified | |
| | Line type | Area > 0.1mm Area ≥ 0.03mm & width <0.1mm and length < 10mm Area < 0.05mm | : to be zero : to be max. 1 point : none specified | |
| Scratch | | Area ≥ 0.1 mm Area ≥ 0.03 mm & width <0.1mm with length < 80mm Area < 0.03mm & width <0.1mm with length < 30mm | : to be zero : to be max. 1 point : none specified | |
| Dot blur or hard coat missing | | Area ≥ 0.5 mm ² Area ≥ 0.03 mm ² & area < 0.5mm ² Area < 0.05mm ² | : to be zero : to be max. 5 points : none specified | |
| Newton RingThese must not be seen from Panel film side under a fluorescent lamp wavelength type lamp). Not to be verified form glass side. | | | | |
| Glass flaw | | To be no flaw which is bigger than that shown in the fol number of flaws is not specified. | 3mm 5mm | |


■ 8.0 GENERAL POINTS OF CAUTION

Touch panels are made of glass, so care must be taken in handling them. Do not stress, pile, bend, lift by the cable or put any stress on the film, for example moving by film face vacuum. In order to clean wring dry a cloth which has been emersed in a natural detergent. DO NOT use any organic solvent, acid or alkali solution. Watch the edge of the panel when cleaning, again for safety reasons.

■ 9.0 CONNECTION AND MOUNTING


The details below indicate the recommended mounting structure for panel and enclosure. The enclosure support to fix the touch panel must be over 1.0mm I width and must be outside the view (Transparent area). Also ensure that the enclosure does not cause miss input by touching the view area.

The following diagram shows that the enclosure edge must be between the View area and the guaranteed active area. Ensure space is allocated for the diodes, and we recommend that the material to fix the panel and enclosure is elastic. Special design would be required to stop water ingress. The corners of the touch panel are conductive so do not touch any metal parts after mounting.

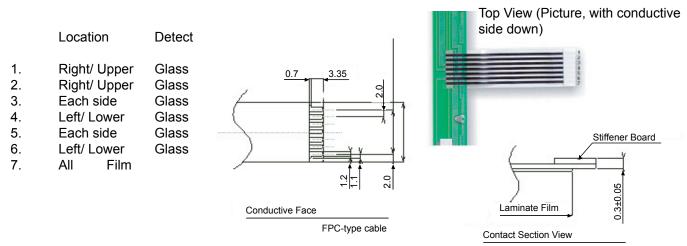

Bottom View (Drawing, with conductive side up)

(Mating connector type FCI or equivalent SFW15R-1ST: for FPC)

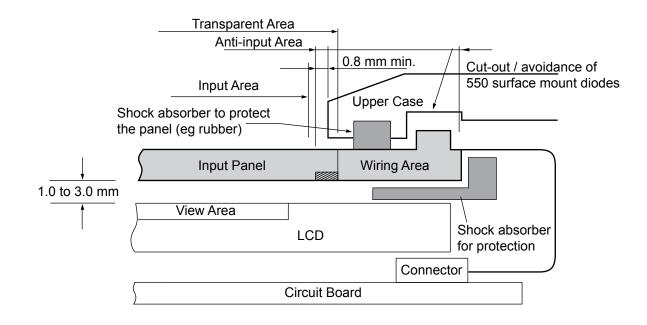

■ 10.0 PANEL THICKNESS



Fujitsu Components International Headquarter Offices

| Japan Fujitsu Component Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626 Email: promothq@ft.ed.fujitsu.com | Europe Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: emea.fujitsu.com/components/ |
|---|---|
| Web: www.fcl.fujitsu.com | Asia Pacific |
| North and South America | Fujitsu Components Asia Ltd. |
| Fujitsu Components America, Inc. | 102E Pasir Panjang Road |
| 250 E. Caribbean Drive | #01-01 Citilink Warehouse Complex |
| Sunnyvale, CA 94089 U.S.A. | Singapore 118529 |
| Tel: (1-408) 745-4900 | Tel: (65) 6375-8560 |
| Fax: (1-408) 745-4970 | Fax: (65) 6273-3021 |
| Email: components@us.fujitsu.com | Email: fcal@fcal.fujitsu.com |
| Web: http://www.fujitsu.com/us/services/edevices/components/ | Web: http://www.fujitsu.com/sg/services/micro/components/ |

©2006 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Rev. May19/2006